

Up To Step

# Sparkling Clean Drip Pans

## Step up to PanGuard

The First Time-Release Cleaning Technology for Drip Pans  
Sizing and Application Information


### PanGuard for Fan Coil and PTAC Air Conditioning Units

If the tonnage of the unit is	for 3 months protection use	for 6 months protection use	Dimensions of product
up to 3/4	RC4/.75	HC4/.75	4" x .75"
1	RC4/1.50	HC4/1.50	4" x 1.50"
	RC8/.75	HC8/.75	8" x .75"
1-2	RC6/1.50	HC6/1.50	6" x 1.50"
2-3	RC8/1.50	HC8/1.50	8" x 1.50"
3-5	RC12/1.50	HC12/1.50	12" x 1.50"
	All 1/8" thick	All 1/4" thick	

### PanGuard CU SERIES for Large Air Handlers

If the tonnage of the unit is	for 3 months protection use	Dimensions of product
6-12	CU-N2	12" x 1.5"
20-25	CU-N	24" x 1.5"
	CU-S	12" x 3"
40-50	CU-D	24" x 3"
	All 3/4" thick	

The **PanGuard CU Series** is adaptable to your needs. You may use multiples and mix sizes within this category to build the best protection for your unit.

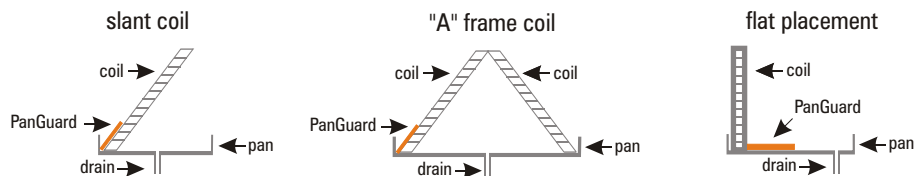

**General Installation:** The unit should be cleaned before installing **PanGuard**.

**PanGuard** does not contain any harsh biocide and is not intended for use as a biocide. The unit should be disinfected beforehand using Fast Attack System Sanitizer.

Choose the **PanGuard** size you need based on the unit's tonnage. If tonnage is not known, matching **PanGuard**'s dimensions to cover 1/2 to 2/3 of the coil length will provide cleaning of the entire pan. Remove from packaging; leave fabric enclose intact. Place **PanGuard** on the surface of the drip pan away from the drainage point. **PanGuard** can also be used in refrigeration units and ice machines where placement does not allow drainage into food or food contact surfaces.

1 ton = 12,000 BTU or approx. 400 CFM

NOT FOR USE IN LIEBERTS OR HUMIDIFIERS

Controlled Release Technologies, Inc. (800) 766-9057  
fax (704) 487-0878 email:custserv@cleanac.com

**PanGuard** is a registered Trademark of Controlled Release Technologies, Inc.