


CONTROLLED-RELEASE & EPA REGISTERED

ALGAE GUARD™

CONDENSATE DRIP PAN MICRO-BIOCIDE

Sizing and Application Information

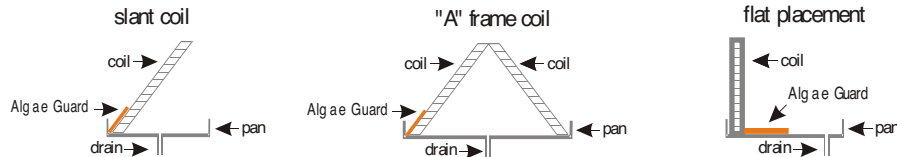

Algae Guard for Fan Coil and PTAC Air Conditioning Units

If the tonnage of the unit is	for 3 months protection use	for 6 months protection use	Dimensions of product
up to 3/4		AG4/.75H	4" x .75"
1	AG4/1.50R	AG4/1.50H	4" x 1.50"
1-2		AG6/1.50H	6" x 1.50"
2-3	AG8/1.50R	AG8/1.50H	8" x 1.50"
3-5	AG12/1.50R	AG12/1.50H	12" x 1.50"
	All 1/8" thick	All 1/4" thick	

Algae Guard CU SERIES for Large Air Handlers

If the tonnage of the unit is	for 3 months protection use	Dimensions of product
6-12	AG-N2	12" x 1.5"
20-25	AG-N	24" x 1.5"
	AG-S	12" x 3"
40-50	AG-D	24" x 3"
	All 3/4" thick	

The Algae Guard Commercial Series adapts to your needs. You may use multiples and mix sizes within this category to build the best protection for your unit.

General Installation: The unit should be cleaned before installing Algae Guard.

Choose the Algae Guard size you need based on the unit's tonnage. If tonnage is not known, matching Algae Guard's dimensions to cover 2/3 of the coil length will provide cleaning of the entire pan.

Remove from packaging; leave fabric enclosure intact. Place Algae Guard on the surface of the drip pan away from the drainage point.

Algae Guard can also be used in refrigeration units and ice machines where placement does not allow drainage into food or food contact surfaces.

NOT FOR USE IN LIEBERTS OR HUMIDIFIERS

1 ton = 12,000 BTU or approx. 400 CFM



Controlled Release Technologies Inc

704-487-0878 tel. 800-766-9057 toll free

704-487-0878 fax custserv@cleanac.com